



OUR PRODUCTS

Brand lighting Co., Limited

Tel: +86-13686972518 / +86-13169807260
Email: info@brand-light.com
Website: www.brand-light.com / www.huicailed.com
brandlight.en.alibaba.com

Add: RM2103 Building 2, Morgan Internation, No.2
Fazhan Road, Pengjiang District, Jiangmen, GD, China

Factory:
1, 4/F, No. 91, Shengyu 1st Street, Sansha Village,
Henglan Town, Zhongshan, Guangdong, China.

TECHNICAL
DECORATIVE
OUTDOOR
EMOTIONAL


Brand lighting Co., Limited

LED Wall Light

led wall light



1

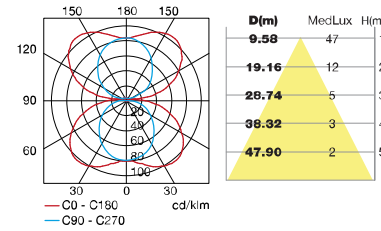

● BR-BD-B001 NEW

LED SMD18W Epistar / 260*100*55mm


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C

IP 65 **RoHS**

- Aluminum lamp body;
- PC diffuser
- Silicone gasket;
- Powder coating finish.

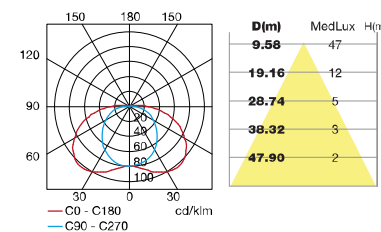

● BR-BD-B002 NEW

LED SMD 9W Epistar / 260*100*55mm

RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C

IP 65 **RoHS**

- Aluminum lamp body;
- PC diffuser
- Silicone gasket;
- Powder coating finish.



led wall light

2



● BR-BD-B003 NEW

LED SMD10W Epistar 100*H200mm



RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC diffuser
- Silicone gasket;
- Powder coating finish.

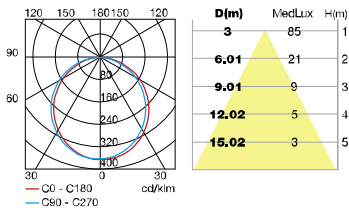

● BR-BD-A005/6S D110*H80mm

● BR-BD-A005/6L D160*H100mm

LED SMD9W/18W Epistar


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC diffuser
- Silicone gasket;
- Powder coating finish.

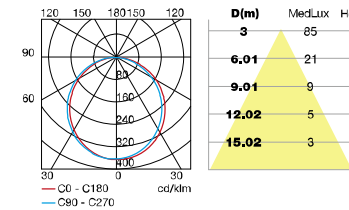

led wall light



● BR-BD-B004 NEW

LED SMD12W Epistar 230*135*48mm




RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC diffuser
- Silicone gasket;
- Powder coating finish.

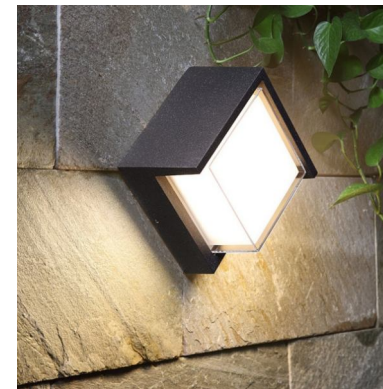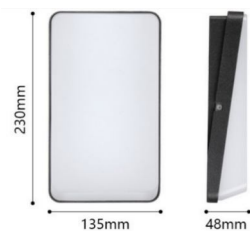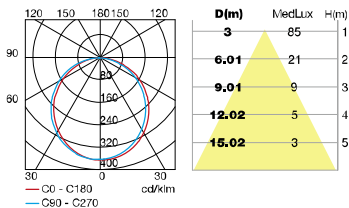

● BR-BD-A007/8S 110*110*H80mm

● BR-BD-A007/8L 160*160*H100mm

LED SMD9W/18W Epistar


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC diffuser
- Silicone gasket;
- Powder coating finish.

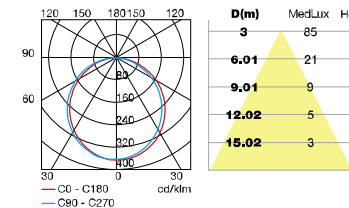

led wall light



- BR-BD-B009-1 ϕ 90*H100mm
- BR-BD-B009-2 ϕ 90*H140mm

LED 7W/2*7W CREE


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- Tempered glass diffuser;
- Silicone gasket;
- Powder coating finish.

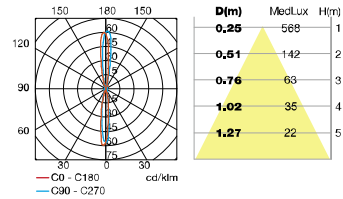

- BR-BD-A001-1 (3/5/9/12/18/20W)
- BR-BD-A001-2 (2*3/5/9/12/18/20W)

LED Bridgelux / CREE COB



RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- Tempered glass diffuser;
- Silicone gasket;
- Powder coating finish.

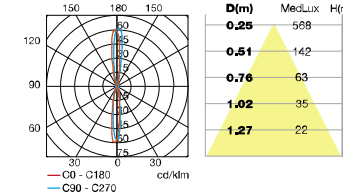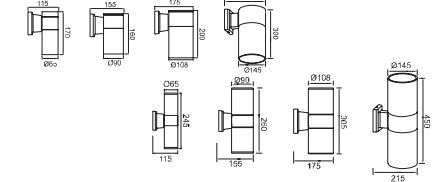

led wall light



- BR-BD-B010RD 100*100*100mm
- BR-BD-B010SQ 100*100*100mm

LED 5W/2*5W COB Epistar



RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- Tempered glass diffuser;
- Silicone gasket;
- Powder coating finish.

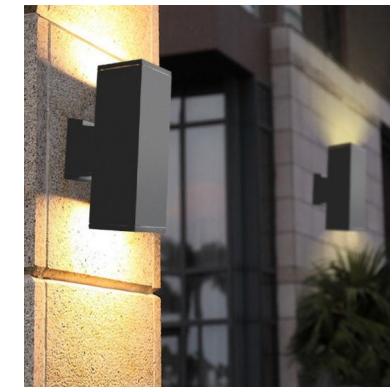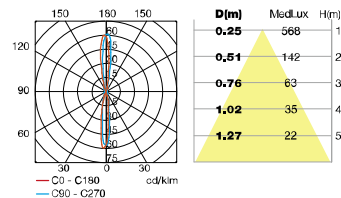

- BR-BD-A002-1 (3/6/12/18W)
- BR-BD-A002-2 (2*3/6/12/18W)

LED Bridgelux / CREE COB



RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz


Working Temp:-25-+45°C



- Aluminum lamp body;
- Tempered glass diffuser;
- Silicone gasket;
- Powder coating finish.

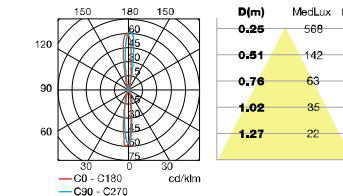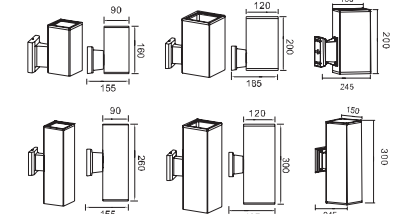

led wall light

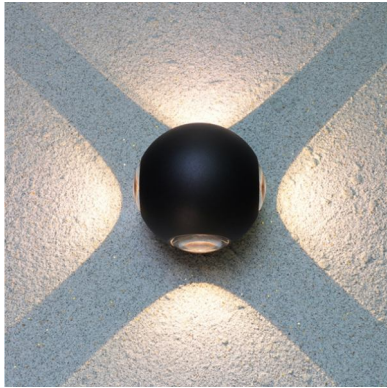

● BR-BD-B011 100*100*94mm

LED 3W/2*3W/4*3W CREE


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC Diffuser
- Silicone gasket;
- Powder coating finish.

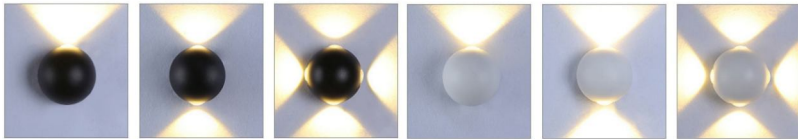

● BR-BD-B013 160*200*45mm

LED SMD12W/18W Epistar


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC Diffuser
- Silicone gasket;
- Powder coating finish.

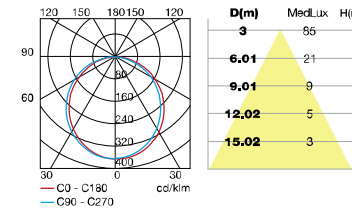

led wall light



● BR-BD-B012S-A(B/C) 260*125*125mm

● BR-BD-B012L-A(B/C) 300*135*140mm

LED SMD 12W/18W


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz


Working Temp:-25-+45°C



- Aluminum lamp body;
- PC Diffuser
- Silicone gasket;
- Powder coating finish.

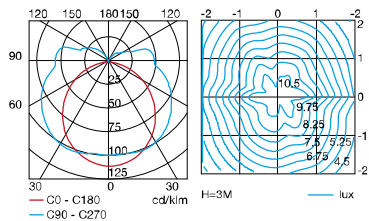

7

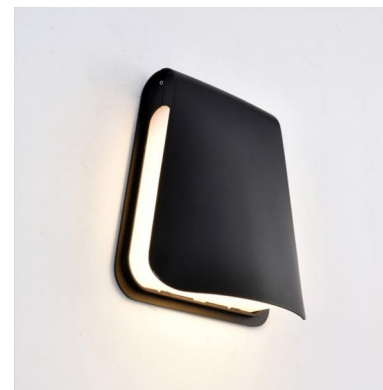

● BR-BD-B014 225*235*95mm

LED SMD12W Epistar


RA>80 PF:0.9 90-100lm/w

AC85-265V 50/60Hz

Working Temp:-25-+45°C



- Aluminum lamp body;
- PC Diffuser
- Silicone gasket;
- Powder coating finish.

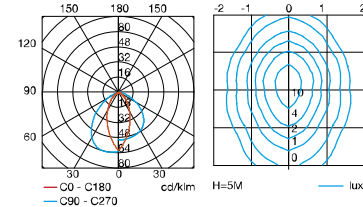


led wall light

8

Beam Angle for the led wall washer

Description	Beam Angle	Recommended Applications
Laser Spot - Highly intense, very focused beam	5°	Very Narrow Columns, Architectural Facade, Sculpture, Between Windows, Architectural Feature
Very Narrow Spot - Very tight beam	10°	Narrow Columns, Architectural Facade, Flagpoles, Very Narrow Trees, Architectural Feature, Landscape Feature
Narrow Spot - Tight beam	15°	Wide Columns, Architectural Facade, Narrow Trees, Flagpoles, Landscape Feature, Architectural Feature
Spot - Medium size beam	20°	Architectural Facade, Trees and Shrubs, Architectural Feature
Flood - Wide beam	40°	Architectural Facade, Trees and Shrubs, Architectural Feature
Flood - Extra wide beam	60°	Architectural Facade, Trees and Shrubs, Bridges, Area Lighting
Wide Flood - Super expansive wide beam	80°	Architectural Facade, Trees and Shrubs, Bridges, Area Lighting
Horizontal Spot - Intense horizontal beam	15+60°	Small Signage, Medium Signage, Architectural Feature
Horizontal Flood - Wide horizontal beam	30+60°	Small Signage, Medium Signage, Landscape Feature, Architectural Facade
Vertical Spot - Intense vertical beam	60+15°	Small Signage, Medium Signage, Narrow Columns, Architectural Feature
Vertical Flood - Wide vertical beam	60+30°	Architectural Facade, Small Signage, Medium Signage, Facade, Wide Columns, Architectural Facade

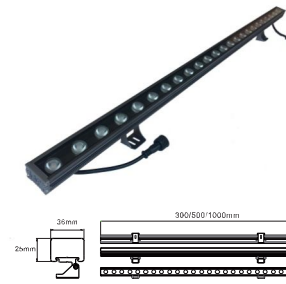

BR-XQD-3625

XQD-3625-18W
XQD-3625-24W
XQD-3625-36W



LED Osram Bridgelux Cree | 2700-6500K | 100-110lm/w

WH	SL	BK	ALU	GBases	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	08	850°C
CRI		PF	DC12V/24V		RGB DMX512		
80		0.9	AC85-265V				

RoHS

XQD-3625-18W

LED 18W,3000K

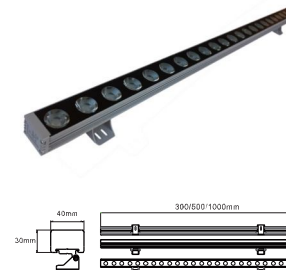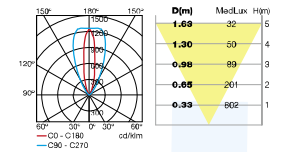

BR-XQD-4030

XQD-4030-36W
XQD-4030-48W


LED Osram Bridgelux Cree | 2700-6500K | 100-110lm/w

WH	SL	BK	ALU	GBases	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	08	850°C
CRI		PF	DC12V/24V		RGB DMX512		
80		0.9	AC85-265V				

RoHS

XQD-4030-36W

LED 36W,3000K

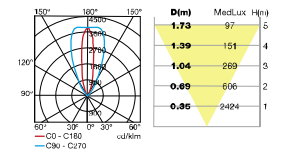





BR-XQD-4545
XQD-4545-24W
XQD-4545-36W

LED Orsam Bridgelux Cree 2700-6500K 100-110lm/w									
WH	SL	BK	ALU	Class	IP	IK	RF		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Body Cover	65	08	850°C		
CRI	PF	AC85-265V	RGB	DMX512					
80	0.9	50/60Hz							

RoHS

XQD-4545-36W
LED 36W,3000K

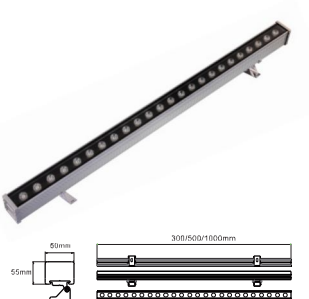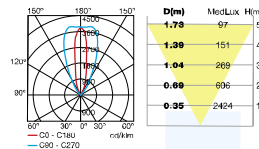


BR-XQD-5055
XQD-5055-18W
XQD-5055-24W
XQD-5055-36W

LED Orsam Bridgelux Cree 2700-6500K 100-110lm/w									
WH	SL	BK	ALU	Class	IP	IK	RF		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Body Cover	65	08	850°C		
CRI	PF	AC85-265V	RGB	DMX512					
80	0.9	50/60Hz							

RoHS

XQD-4030-36W
LED 36W,3000K

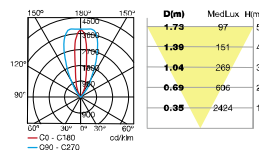

BR-XQD-6045




XQD-6045-36W
XQD-6045-48W


LED Orsam Bridgelux Cree 2700-6500K 100-110lm/w									
WH	SL	BK	ALU	Class	IP	IK	RF		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Body Cover	65	08	850°C		
CRI	PF	AC85-265V	RGB	DMX512					
80	0.9	50/60Hz							

RoHS

XQD-6045-36W
LED 36W,3000K

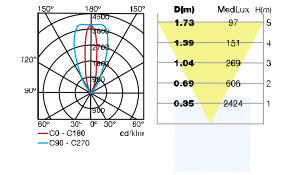

BR-XQD-10095

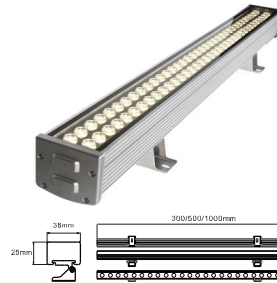


XQD-10095-72W


LED Orsam Bridgelux Cree 2700-6500K 100-110lm/w									
WH	SL	BK	ALU	Class	IP	IK	RF		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Body Cover	65	08	850°C		
CRI	PF	AC85-265V	RGB	DMX512					
80	0.9	50/60Hz							

RoHS

XQD-10095-72W
LED 72W,3000K

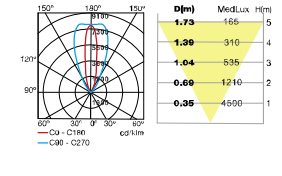

BR-XQD-2828

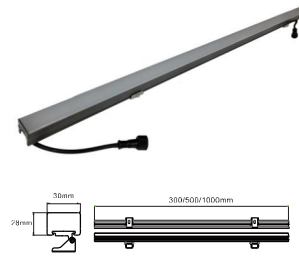


XQD-3028-12W


LED SMD Epistar 2700-6500K 100-110lm/w									
WH	SL	BK	ALU	Class	IP	IK	RF		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Body Cover	65	08	850°C		
CRI	PF	AC85-265V	RGB	DMX512					
80	0.9	50/60Hz							

RoHS

XQD-3028-12W
LED 12W,3000K

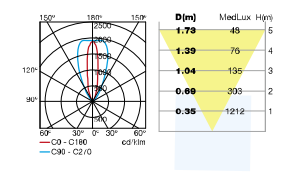

BR-XQD-2828

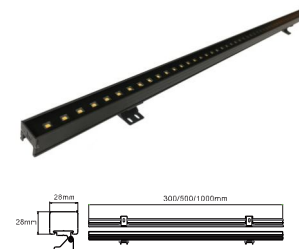


XQD-2828-12W

LED SMD Epistar 2700-6500K 100-110lm/w									
WH	SL	BK	ALU	Class	IP	IK	RF		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Body Cover	65	08	850°C		
CRI	PF	AC85-265V	RGB	DMX512					
80	0.9	50/60Hz							

RoHS

XQD-2828-12W
LED 12W,3000K

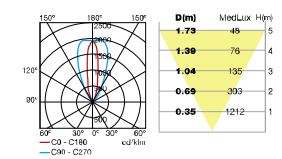



BR-DMD-A001

DMD-A001-1W (ø 65mm)
 DMD-A001-3W (ø 80/90/100mm)
 DMD-A001-6W (ø 120/130mm)
 DMD-A001-9W (ø 160mm)

LED Brigdelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	Br	ALU	Glass	IP 65	IK 10	PF 85°C
			Body	Cover			

CRI	PF	AC85-265V
80	0.9	50/60Hz



DMD-A001-3W

LED 3W,3000K

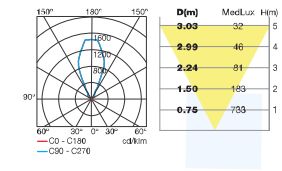

BR-DMD-A001

DMD-A001-12W (ø 180mm)
 DMD-A001-18W (ø 200/220mm)
 DMD-A001-24W (ø 230/250mm)
 DMD-A001-36W (ø 300mm)

LED Brigdelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	Br	ALU	Glass	IP 65	IK 10	PF 85°C
			Body	Cover			

CRI	PF	AC85-265V
80	0.9	50/60Hz



DMD-A001-12W

LED 12W,3000K

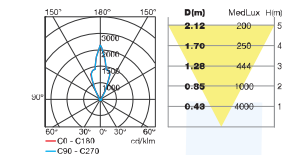

BR-DMD-A002

DMD-A002-10W (ø 150/180mm)
 DMD-A002-20W (ø 200mm)
 DMD-A002-30W (ø 220mm)
 DMD-A002-50W (ø 250mm)

LED Brigdelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	Br	ALU	Glass	IP 65	IK 10	PF 85°C
			Body	Cover			

CRI	PF	AC85-265V
80	0.9	50/60Hz



DMD-A002-12W

LED 12W,3000K

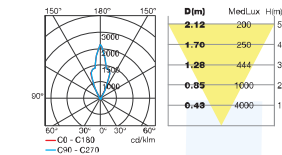

BR-DMD-A003

DMD-A003-3W (ø 100mm)
 DMD-A003-5W (ø 120mm)
 DMD-A003-7W (ø 150mm)
 DMD-A003-9W (ø 160mm)
 DMD-A003-12W (ø 180mm)

LED Brigdelux | 2700-6500K RGB DMX512 | 100-110lm/w

WH	SL	Br	ALU	Glass	IP 65	IK 10	PF 85°C
			Body	Cover			

CRI	PF	AC85-265V
80	0.9	50/60Hz



One way Two Way



Three way Four way



BR-SDD-A001

SDD-A001-3W(φ82*140mm)
 SDD-A001-6W(φ120*140mm)
 SDD-A001-9W(φ145*180mm)
 SDD-A001-12W(φ160*180mm)

LED Bridgelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ss304	Glass	IP	IK	RF
Body	Cover	65	10	850°C			

CRI	PF	AC85-265V
80	0.9	50/60Hz

RoHS

SDD-A001-3W

LED 3W,3000K

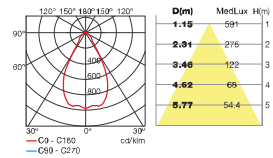

BR-DMD-A001

SDD-A001-18W(φ190*200mm)
 SDD-A001-24W(φ210*240mm)
 SDD-A001-36W(φ230*300mm)

LED Bridgelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ss304	Glass	IP	IK	RF
Body	Cover	65	10	850°C			

CRI	PF	AC85-265V
80	0.9	50/60Hz

RoHS

SDD-A001-24W

LED 24W,3000K

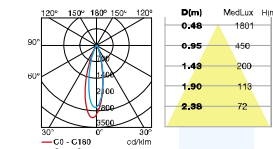

BR-SDD-A002

SDD-A002-6W(φ130*85mm)
 SDD-A002-9W(φ160*85mm)
 SDD-A002-12W(φ180*85mm)
 SDD-A002-18W(φ220*85mm)

LED Bridgelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ss304	Glass	IP	IK	RF
Body	Cover	65	10	850°C			

CRI	PF	AC85-265V
80	0.9	50/60Hz

RoHS

SDD-A002-12W

LED 12W,3000K

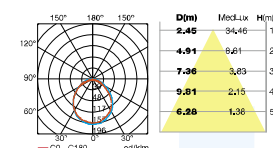

BR-SDD-A003

SDD-A003-6W(φ230*50mm)
 SDD-A003-9W(φ300*50mm)
 SDD-A003-12W(φ300*50mm)
 SDD-A003-15W(φ300*50mm)
 SDD-A003-15W(φ300*50mm)

LED Bridgelux | 2700-6500K RGB DMX512 | 100-110lm/w



WH	SL	BK	ss304	Glass	IP	IK	RF
Body	Cover	65	10	850°C			

CRI	PF	AC85-265V
80	0.9	50/60Hz

RoHS

SDD-A003-18W

LED 18W,3000K

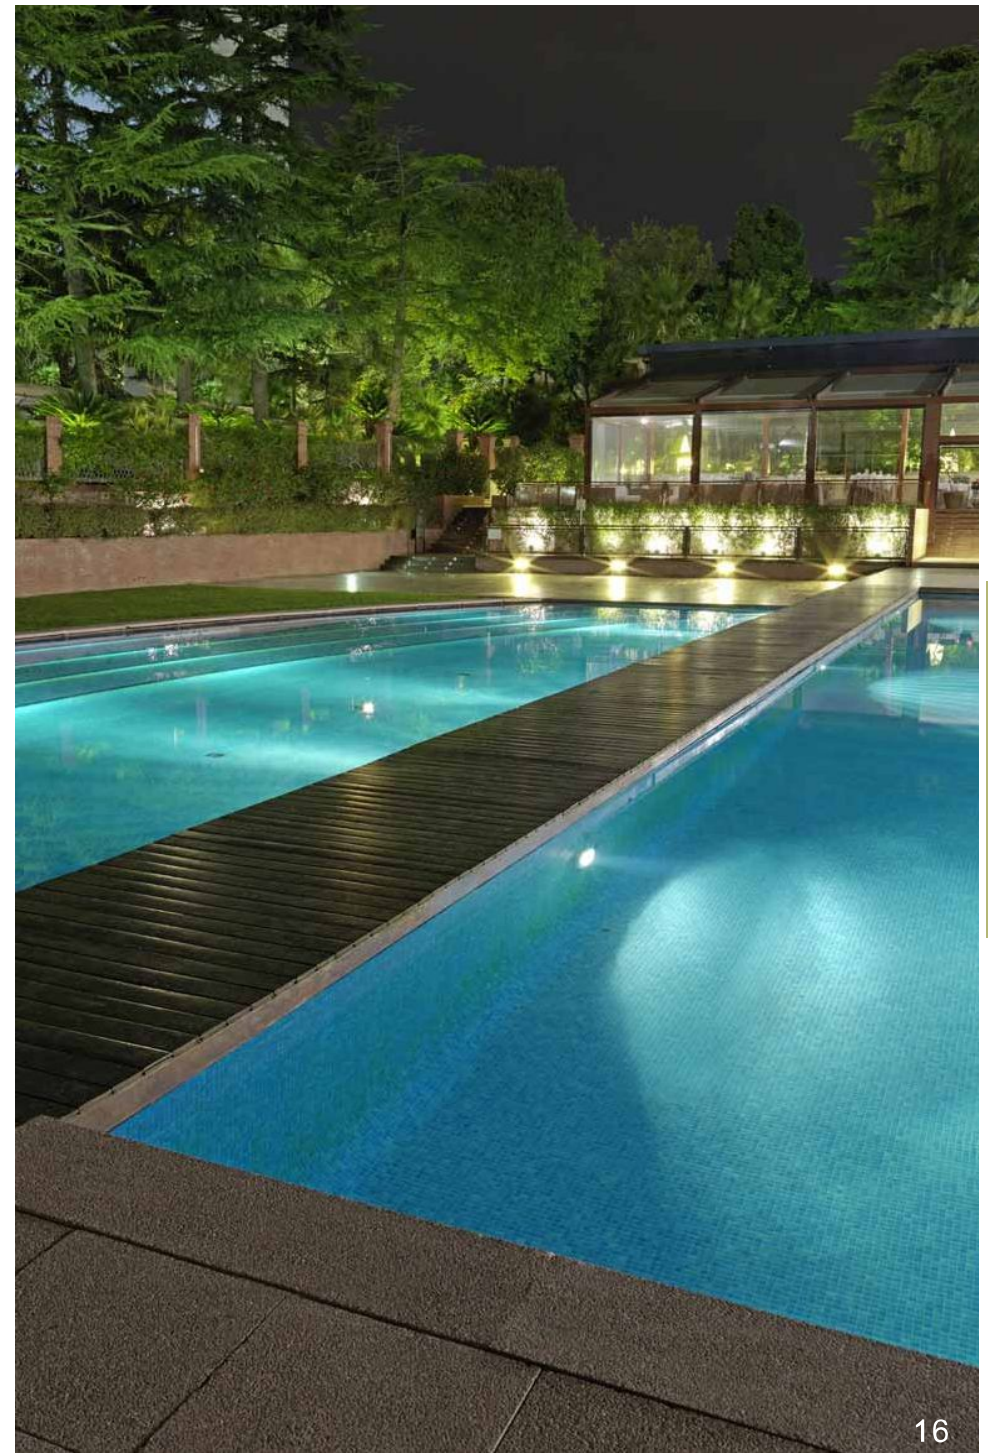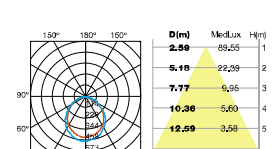

LED Spotlight



led flood light

led flood light

BR-TGD-B001

TGD-B001-10W(65*65*80mm)
TGD-B001-20W(90*90*100mm)
TGD-B001-30W(120*120*120mm)
TGD-B001-50W(150*150*140mm)

LED Bridgelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



TGD-B001-10W

LED 10W,3000K

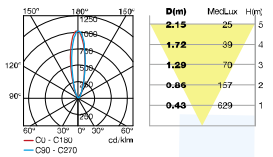

BR-TGD-B002

TGD-B002-3W(65*65*80mm)
TGD-B002-5W(90*90*100mm)
TGD-B002-9W(120*120*120mm)
TGD-B002-16W(150*150*140mm)

LED Bridgelux | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



TGD-B002-9W

LED 9W,3000K

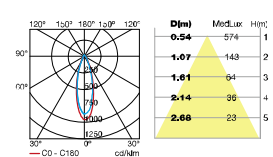


BR-TGD-B003

TGD-B003-4*3W(130*130*85mm)
TGD-B003-5*4W(160*160*85mm)
TGD-B003-8*5W(190*190*85mm)
TGD-B003-16*5W(200*200*85mm)

LED CREE | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



BR-TGD-B003-20W

LED 20W,3000K

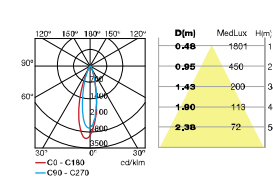

BR-TGD-B004

TGD-B004-3*1W(φ91*140mm)
TGD-B004-9*1W(φ140*170mm)
TGD-B004-18*1W(φ180*208mm)
TGD-B004-36*1W(φ230*215mm)

LED Orsam | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



TGD-B004-18W

LED 18W,3000K

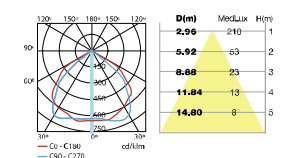

BR-TGD-B005

TGD-B005-3*1W(φ100*150mm)
TGD-B005-9*1W(φ130*220mm)
TGD-B005-18*1W(φ160*220mm)
TGD-B005-36*1W(φ190*250mm)
TGD-B005-54*1W(φ230*265mm)

LED Orsam | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



TGD-B005-18W

LED 18W,3000K

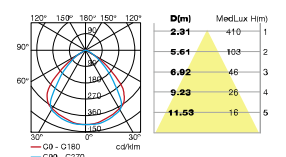

BR-TGD-B006

TGD-B006-3*1W(φ100*150mm)
TGD-B006-9*1W(φ130*220mm)
TGD-B006-18*1W(φ160*220mm)
TGD-B006-36*1W(φ190*250mm)
TGD-B006-54*1W(φ230*265mm)

LED Orsam | 2700-6500K RGB DMX512 | 100-110lm/w


WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



TGD-B006-18W

LED 18W,3000K

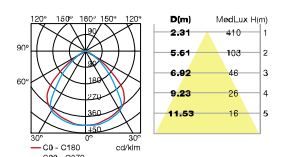


BR-TGD-B007

TGD-B007-7*1W(φ120*160mm)
TGD-B007-12*1W(φ150*280mm)
TGD-B007-18*1W(φ180*220mm)
TGD-B007-24*1W(φ200*240mm)
TGD-B007-36*1W(φ230*275mm)

LED Orsam | 2700-6500K RGB DMX512 | 100-110lm/w

WH	SL	BK	ALU	Glass	IP	IK	RF
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	65	10	850°C
Body		Cover					

CRI	PF	AC85-265V
80	0.9	50/60Hz



TGD-B007-7W

LED 7W,3000K

